

HEAD LAMPS





REFERENCE:
L0150

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.


- Use in accordance to the purpose.



www.truck-kamar.pl

DRIVING LAMP 6X LED

PHOTO AND TECHNICAL DRAWING:

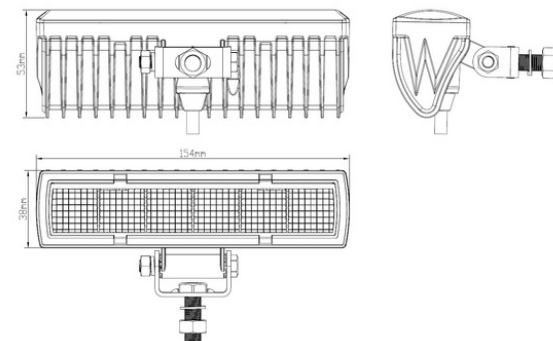

TECHNICAL SPECIFICATIONS:

MATERIAL	LED/LM QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: AL	» 6	» screw	» 250mm	» driving light	» 16W	» 12V/24V	» ECE R10 » ECE R112	» cart. dim.: 170x65x70mm » lamp weight: 350g » 40 pcs/bulk carton

INSTALLATION INSTRUCTIONS:

LED work lamp used to illuminate the working area in vehicles off the public roads. For proper installation and use of lights it is advisable to read the instructions to ensure personal safety and durability of the products. The device must be installed out of reach of children. The appliance must be fitted out of reach of children. If you would like to change the existing incandescent/halogen lighting on LED lighting - installation does not require to make any changes, except replacing the lamps. While installing new / additional LED lighting you must verify the current capacity of the switch to which you are going to connect the lamp. If you exceed the current carrying capacity of the switch to which you want to connect LED lighting, use an additional relay - the installation of lamps should make a professional engineer. Use in airy places. The installation should be made by professional workshop of specialized service. User's manual available for download at www.truck-kamar.pl. Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



REFERENCE:
L3411

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.


- Use in accordance to the purpose.



www.truck-kamar.pl

DRIVING LAMP WITH POSITION LED RING 62X LED

PHOTO AND TECHNICAL DRAWING:

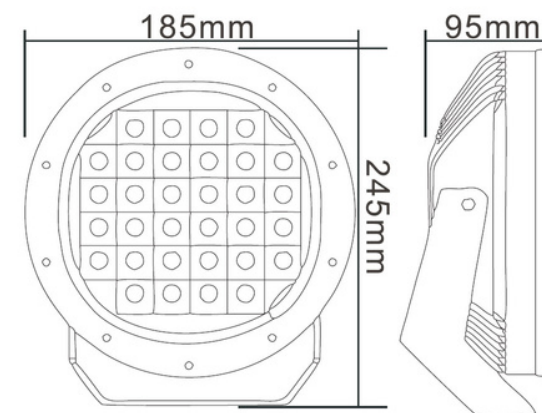

TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: AL	» 62 » 4858 LM	» screw	» 250mm	» position » driving light	» 5W » 68W	» 12V/24V	» ECE R7 » ECE R10 » ECE R112	» cart. dim.: 245x220x145 mm » lampy weight: 2000g » 12 pcs/bulk box

INSTALLATION INSTRUCTIONS:

• It should be used exclusively in accordance with intended use.

• Mount exclusively in specialized workshops.

• The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

• Do not cut off tinned ends.

• Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



REFERENCE:
L3412

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.


- Use in accordance to the purpose.



www.truck-kamar.pl

HEAD LAMP LED + POSITION MIDDLE LED TL 12/24V

PHOTO AND TECHNICAL DRAWING:

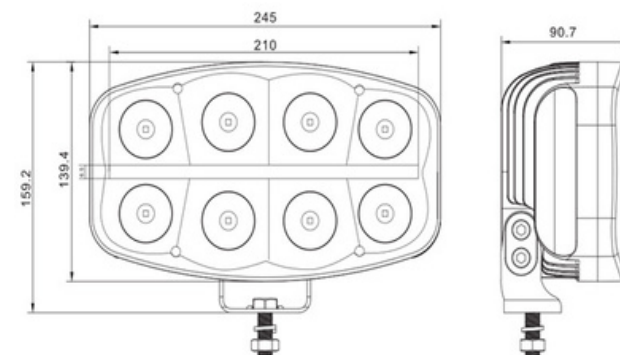

TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: AL	» 18 » 4925 LM	» screw	» 350mm	» position » driving light	» 8W » 55W	» 12V/24V	» ECE R7 » ECE R10 » ECE R112	» cart. dim.: 280x210x120 mm » lampy weight: 1210g » 12 pcs/bulk box

INSTALLATION INSTRUCTIONS:

• It should be used exclusively in accordance with intended use.

• Mount exclusively in specialized workshops.

• The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

• Do not cut off tinned ends.

• Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



REFERENCE:
L3413

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.


- Use in accordance to the purpose.



www.truck-kamar.pl

HEAD LAMP LED + POSITION BOTTOM LED TL12/24V

PHOTO AND TECHNICAL DRAWING:

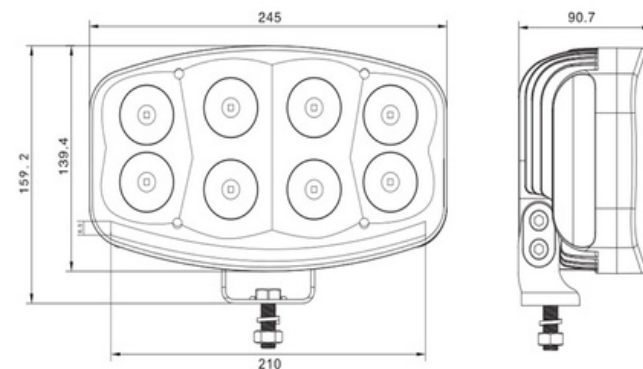

TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: AL	» 18 » 4925 LM	» screw	» 350mm	» position » driving light	» 8W » 55W	» 12V/24V	» ECE R7 » ECE R10 » ECE R112	» cart. dim.: 280x210x120 mm » lampy weight: 1210g » 12 pcs/bulk box

INSTALLATION INSTRUCTIONS:

• It should be used exclusively in accordance with intended use.

• Mount exclusively in specialized workshops.

• The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

• Do not cut off tinned ends.

• Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



REFERENCE:
L3414

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.


- Use in accordance to the purpose.



www.truck-kamar.pl

HEAD LAMP LED + POSITION BOTTOM LED BAT 12/24V

PHOTO AND TECHNICAL DRAWING:

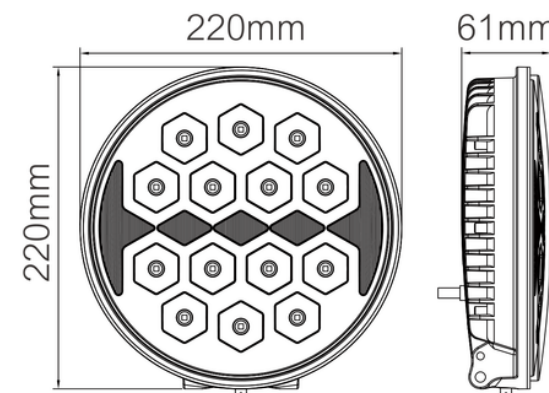

TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: AL	» 23 » 7480 LM	» screw	» 250mm	» position » driving light	» 1,7W » 103W	» 12V/24V	» ECE R7 » ECE R10 » ECE R112	» cart. dim.: 268x95x322 mm » lampy weight: 2000g » 10 pcs/bulk box

INSTALLATION INSTRUCTIONS:

• It should be used exclusively in accordance with intended use.

• Mount exclusively in specialized workshops.

• The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

• Do not cut off tinned ends.

• Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



REFERENCE:
L3415

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.


- Use in accordance to the purpose.



www.truck-kamar.pl

HEAD LAMP LED + DRL LED 12/24V

PHOTO AND TECHNICAL DRAWING:

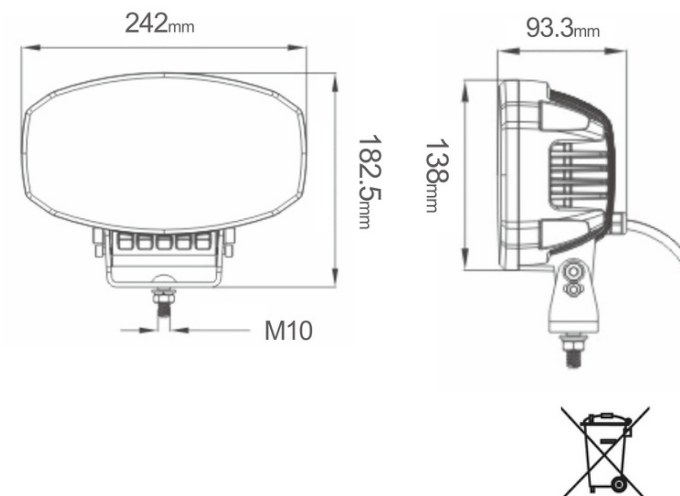

TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: AL	» 16 » 5800 LM	» screw	» 600mm	» DRL » Driving lamp	» 11,8W » 58W	» 12V/24V	» ECE R10 » ECE R87 » ECE R112	» cart. dim: 280x220x130 mm » lamp weight: 2300g » 8 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.

• The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



REFERENCE:
L3416

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.


-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

HEAD LAMP LED + POSITION BOTTOM LED 12/24V

PHOTO AND TECHNICAL DRAWING:

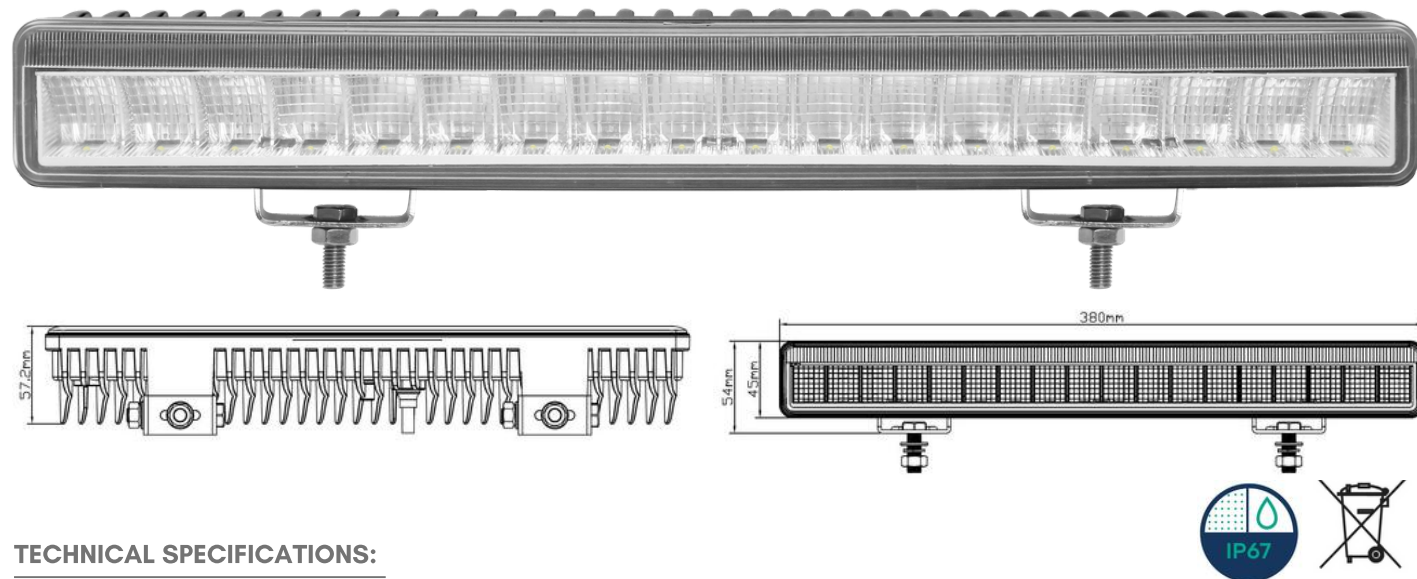

TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: AL	» 18 + 30 » 4000 LM	» screw	» 250mm	» position » driving lamp	» 5W » 45W	» 12V/24V	» ECE R7 » ECE R10 » ECE R112	» cart. dim: 405x74x105 mm » lamp weight: 1000g » 10 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.

- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



www.truck-kamar.pl



REFERENCE:
L3417

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.


-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

HEAD LAMP LED 11" + POSITION BOTTOM LED

PHOTO AND TECHNICAL DRAWING:

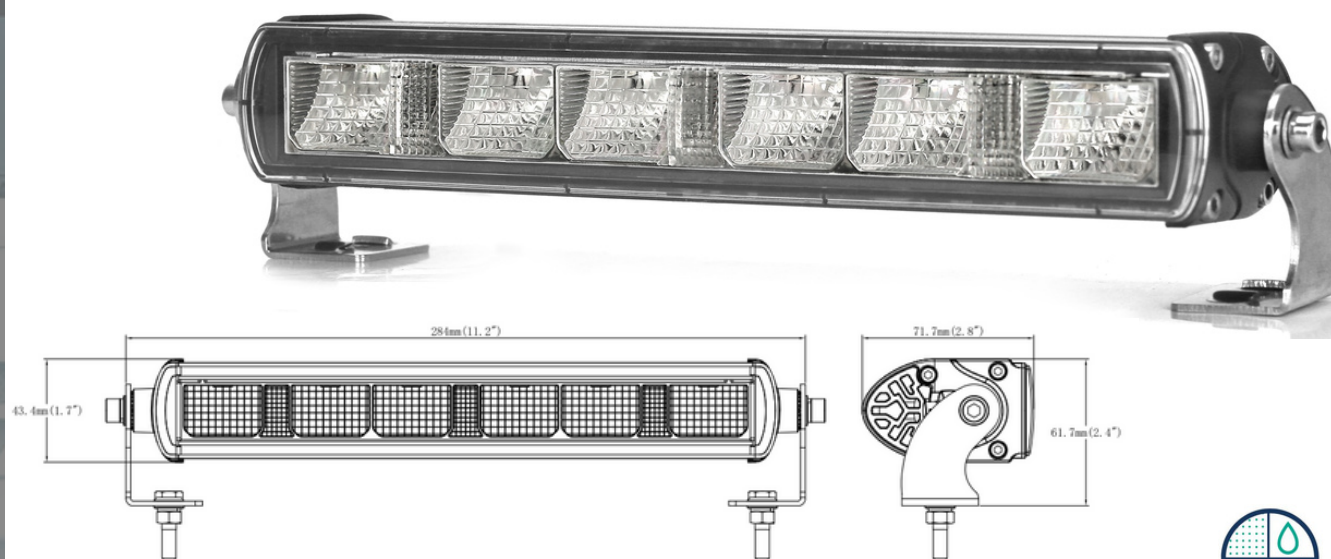

TECHNICAL SPECIFICATIONS:

MATERIAL	LED/LM QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING/WEIGHT
» Lens: PC » Housing: AL	» 6 » 1570 LM	» screw	» 250mm	» DRL » Driving lamp	» 3W » 20W	» 12V/24V	» ECE R10 » ECE R148 » ECE R149	» cart. dim: 370x76x88 mm » lamp weight: 500g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.

- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



www.truck-kamar.pl



REFERENCE:
L3418

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.



-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

HEAD LAMP LED 21" + POSITION BOTTOM LED

PHOTO AND TECHNICAL DRAWING:

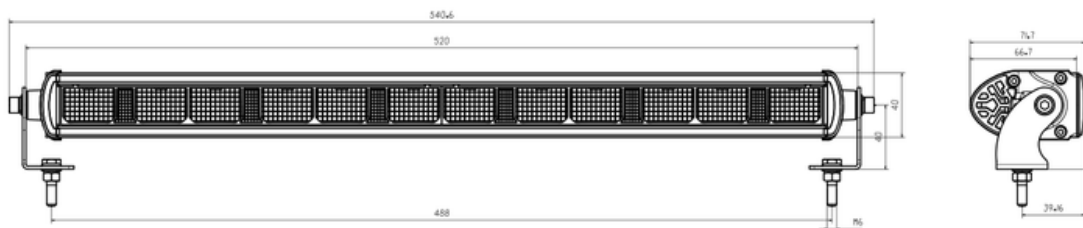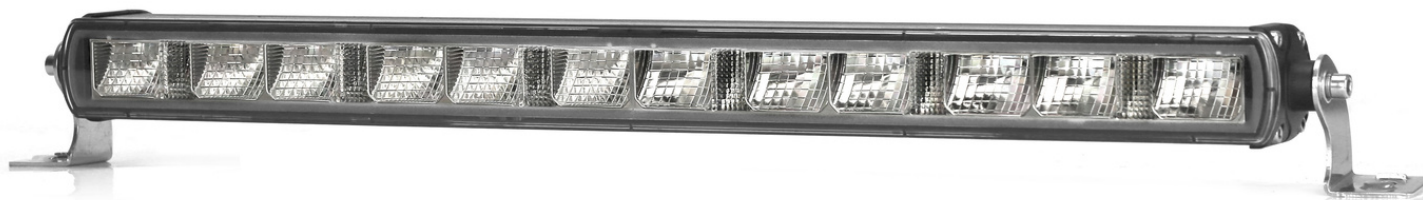

TECHNICAL SPECIFICATIONS:

MATERIAL	LED/LM QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING/WEIGHT
» Lens: PC » Housing: AL	» 12 » 3340 LM	» screw	» 250mm	» DRL » Driving lamp	» 3W » 47W	» 12V/24V	» ECE R10 » ECE R148 » ECE R149	» cart. dim: 605x76x88 mm » lamp weight: 1000g » 10 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.

- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



www.truck-kamar.pl



REFERENCE:
L3419

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

HEAD LAMP POSITION MIDDLE FULL LED 12/24V SLIM

PHOTO AND TECHNICAL DRAWING:



TECHNICAL SPECIFICATIONS:

MATERIAL	LED/LM QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: AL	» 10 + 14 pcs » 4000 LM	» screw	» 250mm	» PositionL » Driving lamp	» 8W » 50W	» 12V/24V	» ECE R7 » ECE R10 » ECE R112	» cart. dim: 277x205x112 mm » lamp weight: 1100g » 12 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.

- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



www.truck-kamar.pl



REFERENCE:
L3420

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.


- Use in open space only.

- Use in accordance to the purpose.



www.truck-kamar.pl

PHOTO AND TECHNICAL DRAWING:

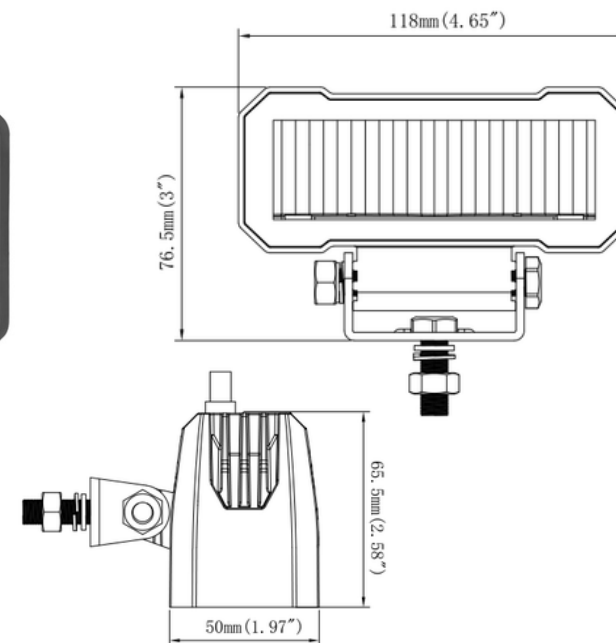

TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: AL	» 2 » 1750 LM	» screw	» 250mm	» driving light	» 24W	» 12V/24V	» ECE R10 » ECE R149	» cart. dim.: 144x128x105 mm » lampy weight: 510g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

• It should be used exclusively in accordance with intended use.

• Mount exclusively in specialized workshops.

• The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

• Do not cut off tinned ends.

• Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



REFERENCE:
L3421

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.


- Use in accordance to the purpose.



www.truck-kamar.pl

HEAD LAMP LED + LINE POSITION LED 12/24V WITH DT CONNECTOR

PHOTO AND TECHNICAL DRAWING:

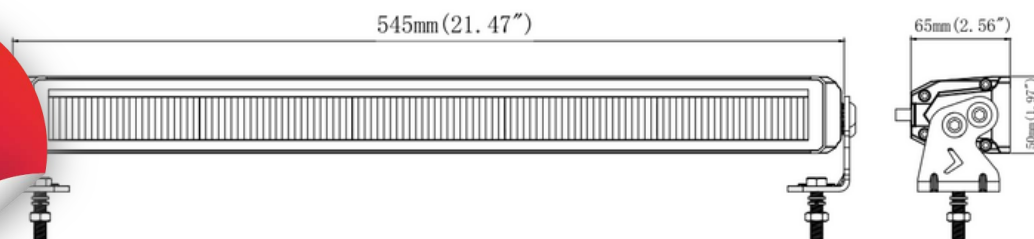

TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: AL	» 10 + 36 » 5730 LM » 16 LM	» screw	» 250mm with DT connector	» line position » driving light	» 10W » 65W	» 12V/24V	» ECE R10 » ECE R148 » ECE R149	» cart. dim.: 655x110x68 mm » lampy weight: 2260g » 8 pcs/bulk box

INSTALLATION INSTRUCTIONS:

• It should be used exclusively in accordance with intended use.

• Mount exclusively in specialized workshops.

• The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

• Do not cut off tinned ends.

• Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



REFERENCE:
L3422

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.


- Use in accordance to the purpose.



www.truck-kamar.pl

HEAD LAMP BEZEL-LESS + STRIP POSITION LED

PHOTO AND TECHNICAL DRAWING:

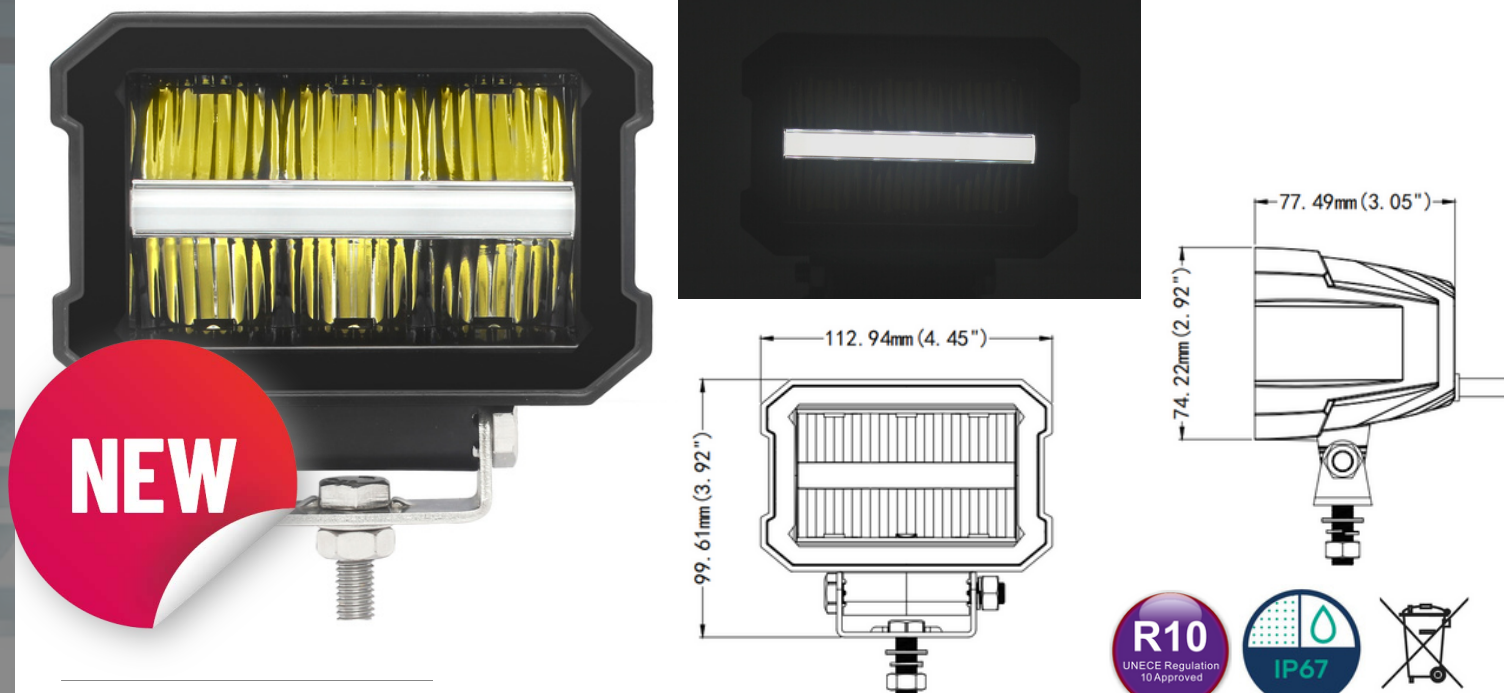

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: AL	» 6 + 6 » 2200 LM	» screw	» 300mm	» line position » driving light	» 3W » 25W	» 12V/24V	» ECE R10 » ECE R148 » ECE R149	» cart. dim.: 142x155x114 mm » lampy weight: 530g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

• It should be used exclusively in accordance with intended use.

• Mount exclusively in specialized workshops.

• The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

• Do not cut off tinned ends.

• Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



REFERENCE:
L3423

HEAD LAMP BEZEL-LESS LONG 12/24V LED WITH DT CONNECTOR

WARNINGS FOR THE USER:

- Do not look directly into the light - it may cause damage or even loss of vision.
- Install only in specialized workshops or professional services.
- Use in open space only.
- Use in accordance to the purpose.

INSTALLATION INSTRUCTIONS:


- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube or alternatively with isolating tape to avoid getting water and moisture to the copper wire of the lamp which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations.

COUNTRY OF ORIGIN: PRC



www.myKAMAR.com

PHOTO AND TECHNICAL DRAWING:

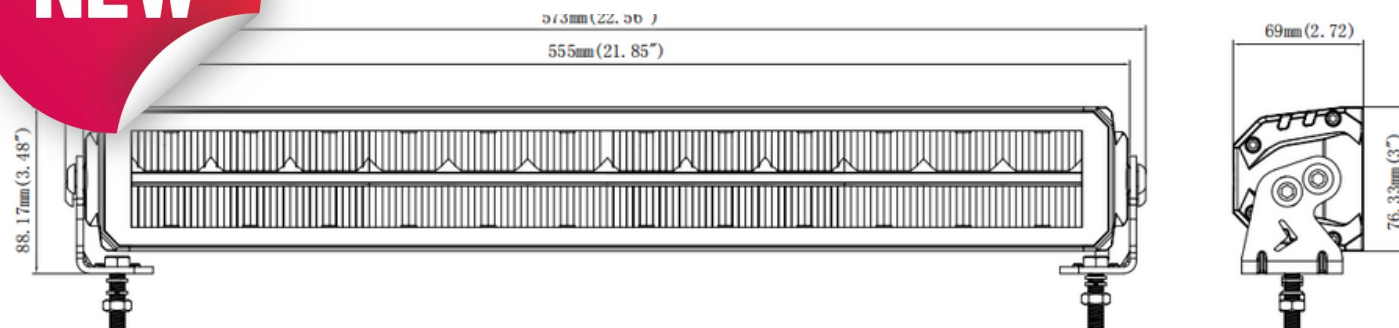

TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING WEIGHT
» Lens: PC » Housing: AL	» 24 + 48 » 7927 LM	» screw	» 300mm with DT connector	» line position » driving light	» 11W » 95W	» 12V/24V	» ECE R10 » ECE R148 » ECE R149	» carton dimension: 657x111x93 mm » lamp weight: 2000g » 4 pcs/bulk box

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

myKAMAR



REFERENCE: L3424

HEAD LAMP LED + LINE POSITION LED 12/24V WITH DT CONNECTOR

WARNINGS FOR THE USER:

- Do not look directly into the light - it may cause damage or even loss of vision.
- Install only in specialized workshops or professional services.
- Use in open space only.
- Use in accordance to the purpose.

INSTALLATION INSTRUCTIONS:


- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube or alternatively with isolating tape to avoid getting water and moisture to the copper wire of the lamp which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations.

COUNTRY OF ORIGIN: PRC



www.myKAMAR.com

PHOTO AND TECHNICAL DRAWING:

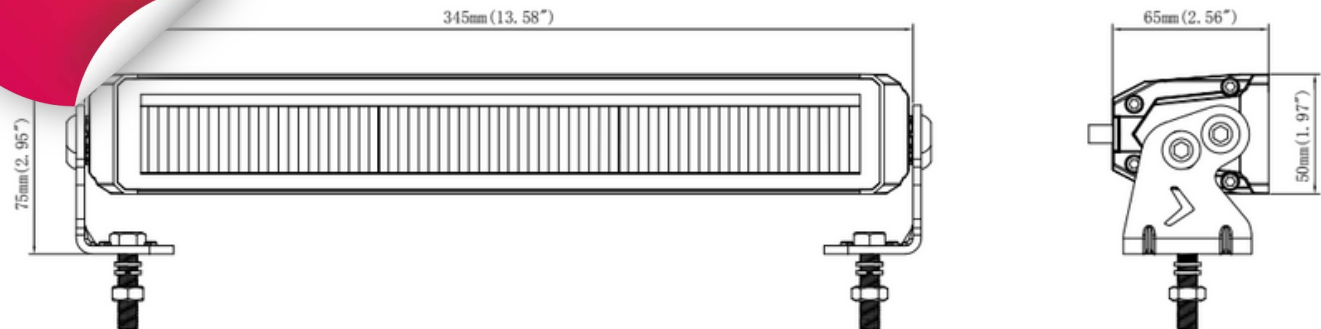

TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING WEIGHT
» Lens: PC » Housing: AL	» 6 + 21 » 3810 LM » 10 LM	» screw	» 300mm with DT connector	» line position » driving light	» 8W » 42W	» 12V/24V	» ECE R10 » ECE R148 » ECE R149	» carton dimension: 462x110x68 mm » lamp weight: 1600g » 8 pcs/bulk box

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



REFERENCE:
L3425

**HEAD LAMP BEZEL-LESS
MEDIUM 12/24V LED**

WARNINGS FOR THE USER:

- Do not look directly into the light - it may cause damage or even loss of vision.
- Install only in specialized workshops or professional services.
- Use in open space only.
- Use in accordance to the purpose.




INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube or alternatively with isolating tape to avoid getting water and moisture to the copper wire of the lamp which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations.



www.myKAMAR.com

PHOTO AND TECHNICAL DRAWING:

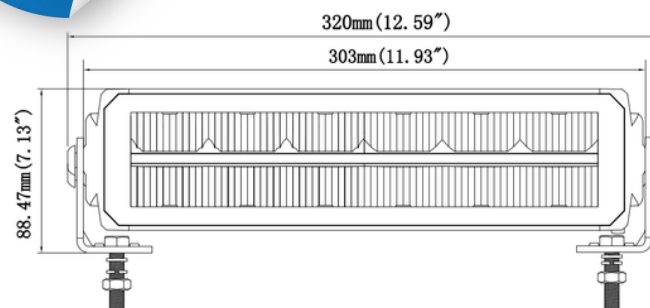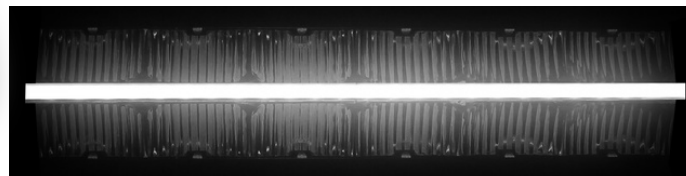

TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING WEIGHT
» Lens: PC » Housing: AL	» 12 + 24 » 4708 LM	» screw	» 250mm with DT connector	» line position » driving light	» 4,5W » 45W	» 12V/24V	» ECE R10 » ECE R148 » ECE R149	» carton dimension: 400x110x95 mm » lamp weight: 1400g » 8 pcs/bulk box

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

myKAMAR

REFERENCE:
L3426

**HEAD LAMP LED R148 R149
R65 12/24V**

WARNINGS FOR THE USER:

- Do not look directly into the light - it may cause damage or even loss of vision.
- Install only in specialized workshops or professional services.
- Use in open space only.
- Use in accordance to the purpose.





INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube or alternatively with isolating tape to avoid getting water and moisture to the copper wire of the lamp which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations.



www.myKAMAR.com

PHOTO AND TECHNICAL DRAWING:

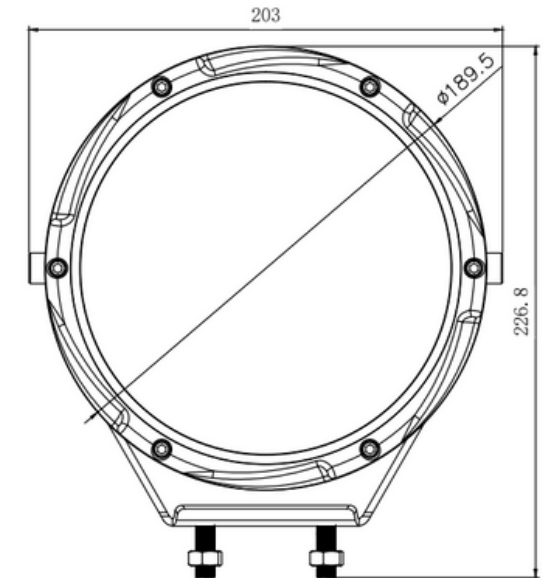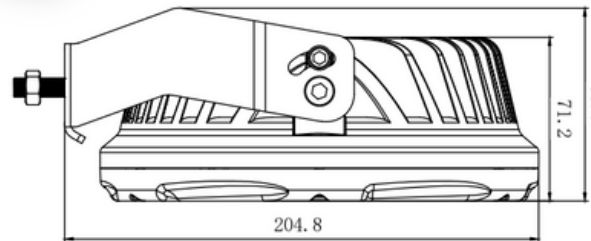

TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING WEIGHT
» Lens: PC » Housing: AL	» 24 + 20 + 20 » 10920 LM	» screw	» 250mm	» line position » driving light » warning lamp	» 4,5W » 100W » 4,5W	» 12V/24V	» ECE R10 » ECE R65 » ECE R148 » ECE R149	» carton dimension: 240x220x103 mm » lamp weight: 1000g » 4 pcs/bulk box

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

KAMAR S.K.A.

Al. Armii Krajowej 254
85-689 Bydgoszcz
Polska

NIP 554-039-23-83
REGON 093051226
KRS 0000112163

tel: /+48 / 52 326 71 50
fax: /+48 / 52 326 71 58
info@trucklamps.eu