



WARNING LAMPS | LIGHTBARS | STROBO LAMPS



WARNING LIGHTBARS

REFERENCE:
BLK0007

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!
-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

www.truck-kamar.pl

WARNING MINI BAR LED 280X165X57MM R65 R10

PHOTO AND TECHNICAL DRAWING:



TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: ABS	» 80	» magnet	» 3000mm spiral cable with plug for lighter socket	» 1 warning flash	» maximum: 50W » average: 18W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 340x190x85 mm » lamp weight: 1370g » 12 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
 - Mount exclusively in specialized workshops.
 - The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
 - Do not cut off tinned ends.
 - Lamps must be installed only in accordance with UNECE regulations
 - Only mount the lamp to a flat, metal, dry, cleaned and degreased roof surface. The maximum speed of movement of the vehicle with a warning lamp attached with a magnet to the roof surface is 50km / h. Take special care in windy conditions. Do not unscrew the lamp, it will lose its water resistance.
- We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

REFERENCE:
BLK0009

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!
-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.


- Use in open space only.

- Use in accordance to the purpose.

www.truck-kamar.pl

WARNING LIGHTBAR LED 1470MM R65 R10

PHOTO AND TECHNICAL DRAWING:

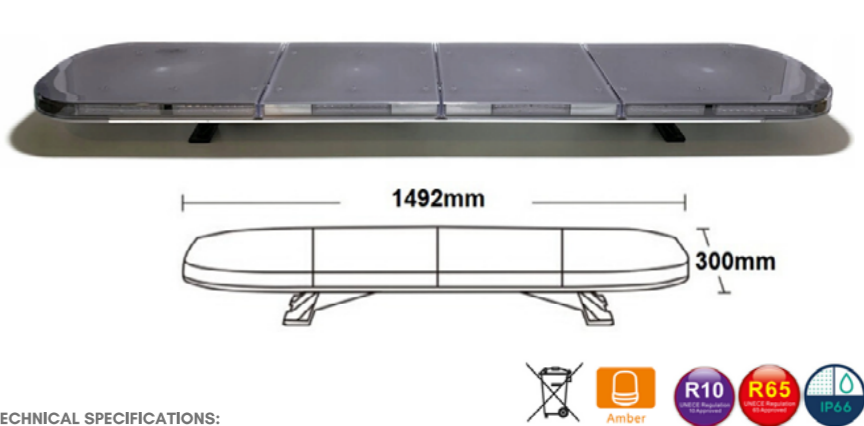

TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: AL	» 144	» screws	» 3000mm	» 8 warnings flashes	» 80W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 1610x360x175 mm » lamp weight: 16500g » 1 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
 - Mount exclusively in specialized workshops.
 - The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
 - Do not cut off tinned ends.
 - Lamps must be installed only in accordance with UNECE regulations
 - Only mount the lamp to a flat, metal, dry, cleaned and degreased roof surface. The maximum speed of movement of the vehicle with a warning lamp attached with a magnet to the roof surface is 50km / h. Take special care in windy conditions. Do not unscrew the lamp, it will lose its water resistance.
- We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

REFERENCE:
BLK0008

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!
-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.


- Use in open space only.

- Use in accordance to the purpose.

www.truck-kamar.pl

WARNING LIGHTBAR LED 1170MM R65 R10

PHOTO AND TECHNICAL DRAWING:

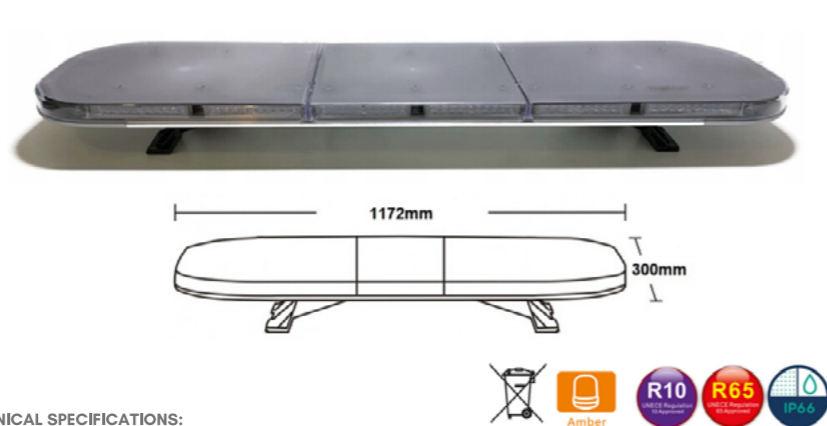

TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: AL	» 144	» screws	» 3000mm	» 8 warnings flashes	» 80W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 1245x360x175 mm » lamp weight: 13500g » 1 pc/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
 - Mount exclusively in specialized workshops.
 - The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
 - Do not cut off tinned ends.
 - Lamps must be installed only in accordance with UNECE regulations
 - Only mount the lamp to a flat, metal, dry, cleaned and degreased roof surface. The maximum speed of movement of the vehicle with a warning lamp attached with a magnet to the roof surface is 50km / h. Take special care in windy conditions. Do not unscrew the lamp, it will lose its water resistance.
- We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

REFERENCE:
BLK0010

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!
-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

www.truck-kamar.pl

WARNING MINI BAR LED 315X165X70MM R65 R10

PHOTO AND TECHNICAL DRAWING:




TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: ABS	» 72	» magnet	» 3000mm spiral cable with plug for lighter socket	» 1 warning flash	» 42W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 330x170x100 mm » lamp weight: 750g » 12 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
 - Mount exclusively in specialized workshops.
 - The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
 - Do not cut off tinned ends.
 - Lamps must be installed only in accordance with UNECE regulations
 - Only mount the lamp to a flat, metal, dry, cleaned and degreased roof surface. The maximum speed of movement of the vehicle with a warning lamp attached with a magnet to the roof surface is 50km / h. Take special care in windy conditions. Do not unscrew the lamp, it will lose its water resistance.
- We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



REFERENCE:
BLK0042

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:


Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.



www.truck-kamar.pl

LED WARNING LIGHTBAR 1223MM R10 R65

PHOTO AND TECHNICAL DRAWING:

TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: aluminium	» 204	» screws	» 5000mm	» 4 warning flashes, » two level of intensity, day and night » control box	» 106W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 1575x275x90 mm » lamp weight: 7300g » 1 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



REFERENCE:
BLK0044

WARNING LIGHTBAR LED
SUPER SLIM 473X23MM R10 R65

WARNINGS FOR THE USER:

- Do not look directly into the light - it may cause damage or even loss of vision.

- Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

INSTALLATION INSTRUCTIONS:


- It should be used exclusively in accordance with intended use.

- Mount exclusively in specialized workshops.

- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube or alternatively with isolating tape to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

- Do not cut off tinned ends.

- Lamps must be installed only in accordance with UNECE regulations.



www.myKAMAR.com

PHOTO AND TECHNICAL DRAWING:

TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING WEIGHT
» Lens: PC » Housing: ABS	» 36	» screws	» 5000mm	» 3 warning flashes » control box	» 13W	» 12V/24V	» ECE R10 » ECE R65	» carton dimension: 80x60x695 mm » lamp weight: 1000g » 20 pcs/bulk box

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

LED WARNING LIGHTBAR 1528MM R10 R65

PHOTO AND TECHNICAL DRAWING:


TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: aluminium	» 252	» screws	» 5000mm	» 4 warning flashes, » two level of intensity, day and night » control box	» 122W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 1880x275x90 mm » lamp weight: 8700g » 1 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



REFERENCE:
BLK0043

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:


Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.



www.truck-kamar.pl



ROTATING WARNING LAMP 8LED 13W R65 R10 FLEX

PHOTO AND TECHNICAL DRAWING:



TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: ABS	» 8	» flex	» ----	» 1 rotating fflash	» 13W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 150x150x190 mm » waga lampy: 420g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

REFERENCE:
ALR0010

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

- Warning!
- Do not look directly into the light - it may cause damage or even loss of vision.
 - Install only in specialized workshops or professional services.
 - Use in open space only.
 - Use in accordance to the purpose.



WARNING LAMP 18XLED*3W R65 R10 MAGNET

PHOTO AND TECHNICAL DRAWING:



TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: ABS	» 18	» magnet	» 3000mm spiral cable with plug for lighter socket	» 1 warning flash	» 54W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 150x150x190 mm » lamp weight: 810g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

WARNING LAMP 18XLED*3W R65 R10 SCREW

PHOTO AND TECHNICAL DRAWING:



TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: ABS	» 18	» screw	» 100mm	» 1 warning flash	» 54W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 150x150x210 mm » lamp weight: 610g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

REFERENCE:
ALR0011

COUNTRY OF ORIGIN: PRC


WARNINGS FOR THE USER:

- Warning!
- Do not look directly into the light - it may cause damage or even loss of vision.
 - Install only in specialized workshops or professional services.
 - Use in open space only.
 - Use in accordance to the purpose.



WARNING LAMP 18XLED*3W R65 R10 3 SCREWS

PHOTO AND TECHNICAL DRAWING:

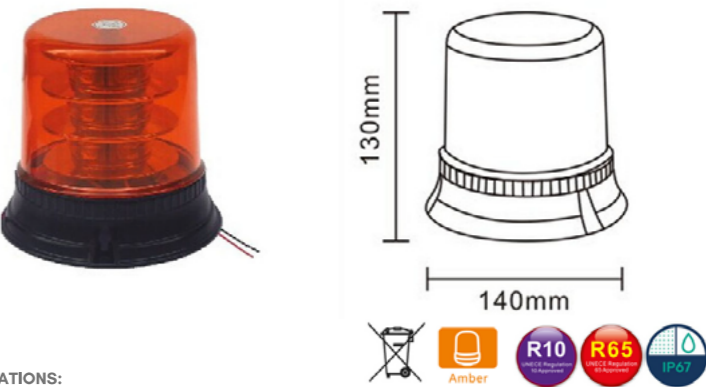

TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: ABS	» 18	» 3 screws	» 300mm	» 1 warning flash	» 54W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 150x150x190 mm » lamp weight: 580g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

REFERENCE:
ALR0006-O

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

- Warning!
- Do not look directly into the light - it may cause damage or even loss of vision.
 - Install only in specialized workshops or professional services.
 - Use in open space only.
 - Use in accordance to the purpose.






REFERENCE:
ALR0024-2

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

www.truck-kamar.pl

WARNING LAMP 45XLED*3W R65 R10

PHOTO AND TECHNICAL DRAWING:

SPECYFIKACJA TECHNICZNA:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: ABS	» 45	» stiff mounting	» ----	» 2 warning flashes	» 20W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 140x140x220 mm » lamp weight: 420g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

-It should be used exclusively in accordance with intended use.

-Mount exclusively in specialized workshops.

-The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

-Do not cut off tinned ends.

-Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

REFERENCE:
ALR0025

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

www.truck-kamar.pl

WARNING LAMP 18XLED*3W R65 R10 FLEX

PHOTO AND TECHNICAL DRAWING:

TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: PP	» 18	» flex	» ----	» 1 warning flash	» 18W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 130x130x300 mm » lamp weight: 730g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

-It should be used exclusively in accordance with intended use.

-Mount exclusively in specialized workshops.

-The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

-Do not cut off tinned ends.

-Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

REFERENCE:
ALR0024-O

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

www.truck-kamar.pl

ROTATING WARNING LAMP 8LED 13W R65 R10

PHOTO AND TECHNICAL DRAWING:

TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: PC	» 8	» 1 stiff mounting	» ----	» 1 rotating flash	» 13W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 130x130x220 mm » lamp weight: 590g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

-It should be used exclusively in accordance with intended use.

-Mount exclusively in specialized workshops.

-The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

-Do not cut off tinned ends.

-Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

REFERENCE:
ALR0027

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

www.truck-kamar.pl

WARNING LAMP LED OCTAGON II R65 R10 MAGNET

PHOTO AND TECHNICAL DRAWING:

TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: PC	» 48	» magnet	» 3m spiral cable with plug for lighter socket	» 1 warning flash	» 24W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 210x190x90 mm » lamp weight: 540g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

-It should be used exclusively in accordance with intended use.

-Mount exclusively in specialized workshops.

-The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

-Do not cut off tinned ends.

-Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

REFERENCE:
ALR0028

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!
-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

www.truck-kamar.pl

WARNING LAMP LED OCTAGON II R65 WITH FLEX

PHOTO AND TECHNICAL DRAWING:

150 mm

160 mm

Icons: No open flame, Amber, R10, R65, IP66

TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLATGE	CERTIFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: PC	» 48	» flex	» -----	» 1 warning flash	» 24W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 190x190x180 mm » lamp weight: 460g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

REFERENCE:
ALR0030

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!
-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

www.truck-kamar.pl

WARNING LAMP LED UFO II R65 R10 WITH FLEX

PHOTO AND TECHNICAL DRAWING:

175 mm

160 mm

Icons: No open flame, Amber, R10, R65, IP66

TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: ABS	» 48	» flex	» -----	» 1 warning flash	» 24W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 190x190x180 mm » lamp weight: 590g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

REFERENCE:
ALR0029

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!
-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

www.truck-kamar.pl

WARNING LAMP LED UFO II R65 R10 MAGNET

PHOTO AND TECHNICAL DRAWING:

175 mm

70 mm

Icons: No open flame, Amber, R10, R65, IP66

TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: ABS	» 48	» magnet	» 3m spiral cable with plug for lighter socket	» 1 warning flash	» 24W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 210x190x90 mm » lamp weight: 660g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

REFERENCE:
ALR0037

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!
-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

www.truck-kamar.pl

ROTATING WARNING LAMP 8LED 13W R65 R10 MAGNET

PHOTO AND TECHNICAL DRAWING:

140mm

118mm

Icons: No open flame, Amber, R10, R65, IP66


TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: PC	» 8	» magnet	» 3m spiral cable with plug for lighter socket	» 1 rotating flash	» 13W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 150x150x140 mm » lamp weight: 520g » 20 pcs/bulk box


INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations


We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

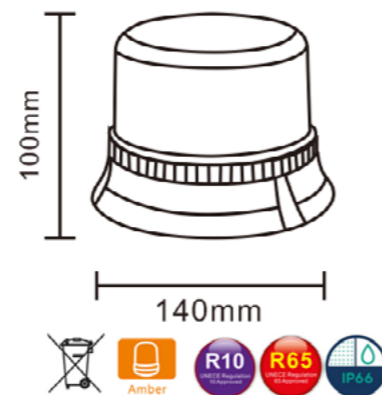MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: PC	» 8	» 1 screw	» 200mm	» 1 rotating flash	» 13W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 150x150x140 mm » lamp weight: 380g » 20 pcs/bulk box

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: PC	» 8	» flex	» ----	» 1 rotating flash	» 13W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 150x150x210 mm » lamp weight: 480g » 20 pcs/bulk box

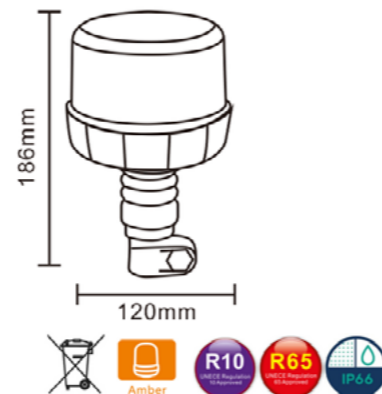MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: PC	» 8	» flex	» ----	» 1 rotating flash	» 13W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 150x150x200 mm » lamp weight: 600g » 20 pcs/bulk box

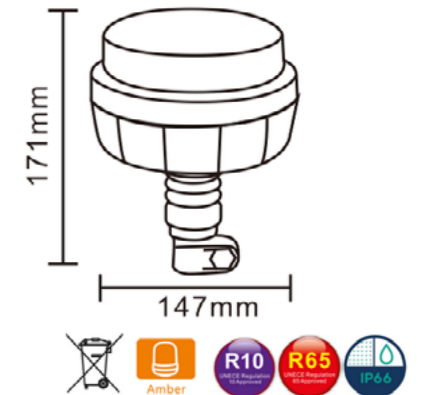

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: PC	» 16	» 3 screws	» 100mm	» 1 rotating flash	» 13W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 150x150x190 mm » lamp weight: 570g » 20 pcs/bulk box



REFERENCE:
ALR0049

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!
-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.



www.truck-kamar.pl

ROTATING WARNING LAMP 16LED 13W R65 R10 STIFF MOUNTING

PHOTO AND TECHNICAL DRAWING:



TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: PC	» 16	» 1 stiff mounting	» ----	» 1 rotating flash	» 13W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 140x140x260 mm » lamp weight: 590g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



REFERENCE:
ALR0054-W

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!
-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.



www.truck-kamar.pl

LED WARNING LAMP TRUCKLED PICO LED WHITE MAGNETIC BASE R10 R65 MINI

PHOTO AND TECHNICAL DRAWING:



TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: PC	» 18	» magnet	» 3m spiral cable with plug for lighter socket	» 3 warning flashes	» 17W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 150x130x60 mm » lamp weight: 390g » 30 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



REFERENCE:
ALR0054

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!
-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.



www.truck-kamar.pl

LED WARNING LAMP PICO LED ORANGE MAGNETIC BASE R10 R65 MINI

PHOTO AND TECHNICAL DRAWING:



TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: PC	» 18	» magnet	» 3m spiral cable with plug for lighter socket	» 3 warning flashes	» 27W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 150x130x60 mm » lamp weight: 390g » 30 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



REFERENCE:
ALR0055

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!
-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.


- Use in accordance to the purpose.



www.truck-kamar.pl

LED WARNING LAMP PICO LED ORANGE FLEX R10 R65 MINI

PHOTO AND TECHNICAL DRAWING:

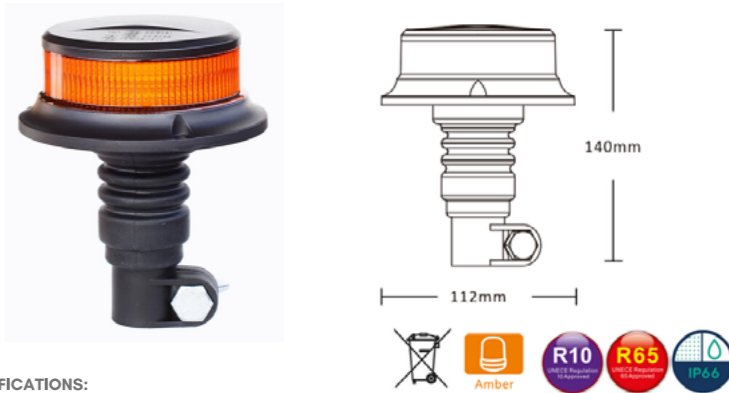


TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: PC	» 18	» flex	» ----	» 3 warning flashes	» 27W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 130x130x160 mm » lamp weight: 390g » 20 pcs/bulk box


INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations


We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: PC	» 18	» flex	» ----	» 3 warning flashes	» 17W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 130x130x160 mm » lamp weight: 390g » 20 pcs/bulk box

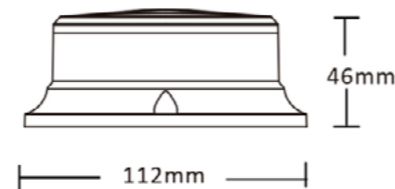

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: PC	» 18	» magnet	» 3m spiral cable with plug for lighter socket	» 3 warning flashes	» 27W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 150x130x60 mm » lamp weight: 390g » 30 pcs/bulk box

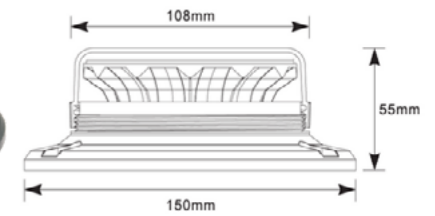MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: ABS	» 12	» magnet	» 3m spiral cable with plug for lighter socket	» 1 warning flash	» 10W	» 12V/24V	» ECE R65 » ECE R10	» cart dim.: 160x160x70 mm » lamp weight: 560g » 20 pcs/bulk box




MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: ABS	» 12	» magnet	» -----	» 1 rotating flash	» 10W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 160x160x180 mm » lamp weight: 620g » 20 pcs/bulk box



REFERENCE:
ALR0064

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.


- Use in accordance to the purpose.



www.truck-kamar.pl

LED WARNING BEACON TRUCKLED OPTI 36X LED 3X SCREW

PHOTO AND TECHNICAL DRAWING:

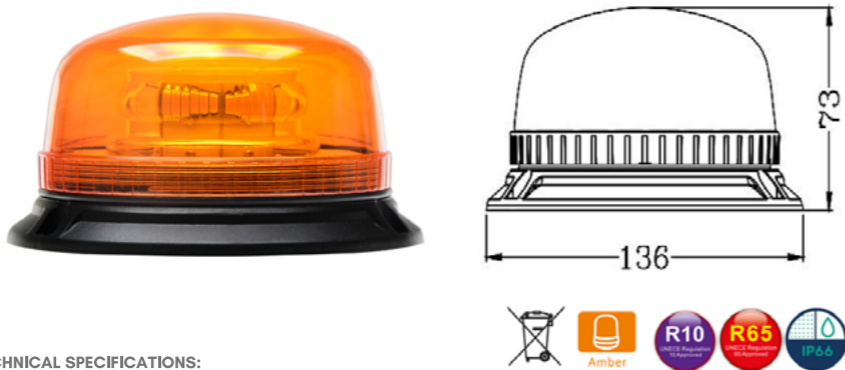

TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: PP	» 36	» 3 screws	» 200mm	» 1 warning flash	» 12-19W	» 12V/24V	» ECE R65 » ECE R10	» wym. kart: 150x150x90 mm » lamp weight: 560g » 30 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



REFERENCE:
ALR0066

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.



www.truck-kamar.pl

LED WARNING BEACON TRUCKLED 39X LED FLEX

PHOTO AND TECHNICAL DRAWING:




TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING
» Lens: PC » Housing: PP	» 39	» flex	» -----	» 1 warning flash	» 19W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 150x150x200 mm » lamp weight: 450g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



REFERENCE:
ALR0065

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.



www.truck-kamar.pl

LED WARNING BEACON TRUCKLED 39X LED MAGNET

PHOTO AND TECHNICAL DRAWING:



TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING
» Lens: PC » Housing: PP	» 39	» magnet	» 3m spiral cable with plug for lighter socket	» 1 warning flash	» 19W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 150x150x150 mm » lamp weight: 600g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



REFERENCE:
ALR0067

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.


- Use in accordance to the purpose.



www.truck-kamar.pl

LED WARNING BEACON TRUCKLED 39X LED BOLT

PHOTO AND TECHNICAL DRAWING:

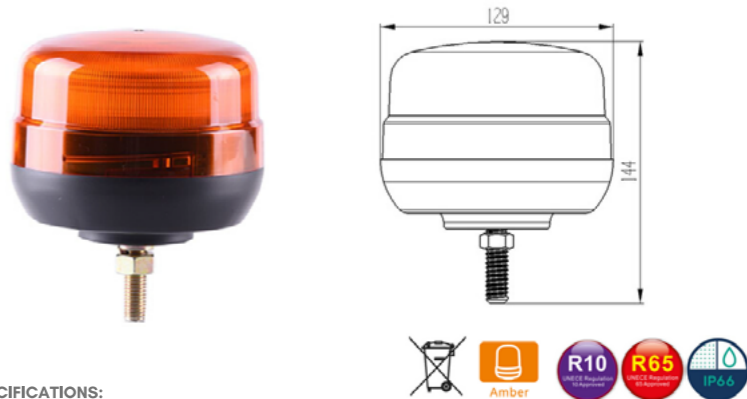

TECHNICAL SPECIFICATIONS:

MATERIAL	IŁOŚĆ LED	MOCOWANIE	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING
» Lens: PC » Housing: PP	» 39	» bolt	» 200mm	» 1 warning flash	» 19W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 150x150x200 mm » lamp weight: 350g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

REFERENCE:
ALR0077

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

www.truck-kamar.pl

LED WARNING LAMP UFO2 MAGNET R10 R65

PHOTO AND TECHNICAL DRAWING:



TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: PC	» 48	» magnet	» 3m spiral cable with plug for lighter socket	» 1 warning flash	» 36W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: x mm » lamp weight: x g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

REFERENCE:
ALR0100

WARNING BEACON SMOOTH
45X LED 3 SCREWS 2 FLASHES

WARNINGS FOR THE USER:

- Do not look directly into the light - it may cause damage or even loss of vision.

- Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

INSTALLATION INSTRUCTIONS:

• It should be used exclusively in accordance with intended use.

• Mount exclusively in specialized workshops.


• The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube or alternatively with isolating tape to avoid getting water and moisture to the copper wire of the lamp which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

• Do not cut off tinned ends.

• Lamps must be installed only in accordance with UNECE regulations.

www.myKAMAR.com

PHOTO AND TECHNICAL DRAWING:

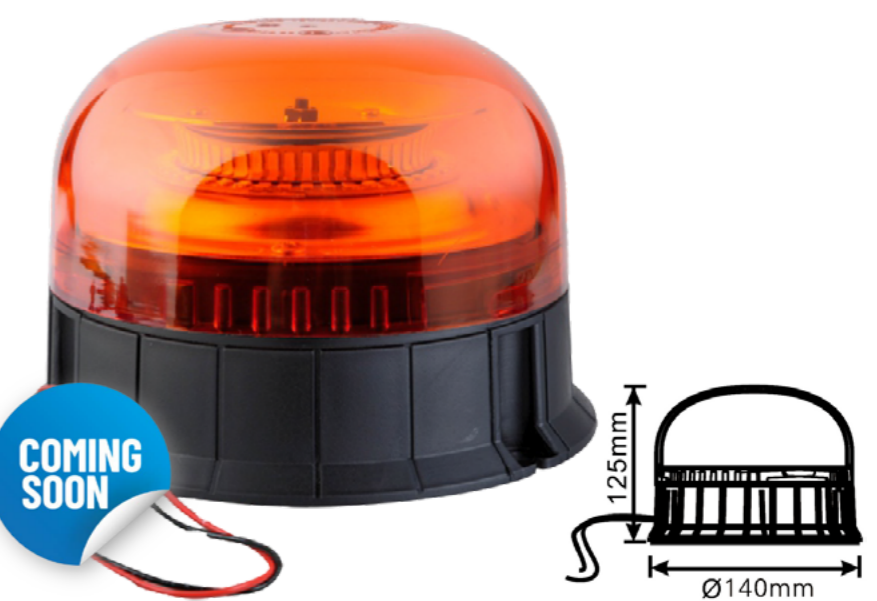

TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING WEIGHT
» Lens: PC » Housing: ABS	» 45	» screws	» 150mm	» 2 warning flashes	» 20W	» 12V/24V	» ECE R10 » ECE R65	» carton dimension: 150x150x140 mm » lamp weight: 360g » 20 pcs/bulk box

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

REFERENCE:
ALR0078

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

www.truck-kamar.pl

LED WARNING LAMP UFO2 FLEX R10 R65

PHOTO AND TECHNICAL DRAWING:



TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: PC	» 48	» flex	» ---	» 1 warning flash	» 36W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: x mm » lamp weight: x g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

REFERENCE:
ALR0101

WARNING BEACON SMOOTH
45X LED MAGNET 2 FLASHES

WARNINGS FOR THE USER:

- Do not look directly into the light - it may cause damage or even loss of vision.

- Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

INSTALLATION INSTRUCTIONS:

• It should be used exclusively in accordance with intended use.

• Mount exclusively in specialized workshops.

• The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube or alternatively with isolating tape to avoid getting water and moisture to the copper wire of the lamp which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

• Do not cut off tinned ends.

• Lamps must be installed only in accordance with UNECE regulations.

www.myKAMAR.com

PHOTO AND TECHNICAL DRAWING:



TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING WEIGHT
» Lens: PC » Housing: ABS	» 45	» magnet	» 3m spiral cable with plug for lighter socket	» 2 warning flashes	» 20W	» 12V/24V	» ECE R10 » ECE R65	» carton dimension: 150x150x140 mm » lamp weight: 550g » 20 pcs/bulk box

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

myKAMAR

REFERENCE:
ALR0102

WARNING BEACON SMOOTH
45X LED FLEX 2 FLASHES

WARNINGS FOR THE USER:

Do not look directly into the light - it may cause damage or even loss of vision.

Install only in specialized workshops or professional services.

Use in open space only.

Use in accordance to the purpose.

INSTALLATION INSTRUCTIONS:

It should be used exclusively in accordance with intended use.

Mount exclusively in specialized workshops.

The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube or alternatively with isolating tape to avoid getting water and moisture to the copper wire of the lamp which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

Do not cut off tinned ends.

Lamps must be installed only in accordance with UNECE regulations.

TRUCK LED T

www.myKAMAR.com

PHOTO AND TECHNICAL DRAWING:

TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING WEIGHT
» Lens: PC » Housing: ABS	» 45	» flexible din base	» no	» 2 warning flashes	» 20W	» 12V/24V	» ECE R10 » ECE R65	» carton dimension: 133x133x210 mm » lamp weight: 510g » 20 pcs/bulk box

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

myKAMAR

REFERENCE:
ALR0104

WARNING BEACON SMOOTH
45X LED MAGNET 2 FLASHES

WARNINGS FOR THE USER:

Do not look directly into the light - it may cause damage or even loss of vision.

Install only in specialized workshops or professional services.

Use in open space only.

Use in accordance to the purpose.

INSTALLATION INSTRUCTIONS:

It should be used exclusively in accordance with intended use.

Mount exclusively in specialized workshops.

The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube or alternatively with isolating tape to avoid getting water and moisture to the copper wire of the lamp which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

Do not cut off tinned ends.

Lamps must be installed only in accordance with UNECE regulations.

TRUCK LED T

www.myKAMAR.com

PHOTO AND TECHNICAL DRAWING:

TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING WEIGHT
» Lens: PC » Housing: ABS	» 45	» magnet	» 3m spiral cable with plug for lighter socket	» 2 warning flashes	» 20W	» 12V/24V	» ECE R10 » ECE R65	» carton dimension: 150x150x140 mm » lamp weight: 560g » 20 pcs/bulk box

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

myKAMAR

REFERENCE:
ALR0103

WARNING BEACON SMOOTH
45X LED SCREW 2 FLASHES

WARNINGS FOR THE USER:

Do not look directly into the light - it may cause damage or even loss of vision.

Install only in specialized workshops or professional services.

Use in open space only.

Use in accordance to the purpose.

INSTALLATION INSTRUCTIONS:

It should be used exclusively in accordance with intended use.

Mount exclusively in specialized workshops.

The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube or alternatively with isolating tape to avoid getting water and moisture to the copper wire of the lamp which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

Do not cut off tinned ends.

Lamps must be installed only in accordance with UNECE regulations.

TRUCK LED T

www.myKAMAR.com

PHOTO AND TECHNICAL DRAWING:

TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING WEIGHT
» Lens: PC » Housing: ABS	» 45	» screw	» 150mm	» 2 warning flashes	» 20W	» 12V/24V	» ECE R10 » ECE R65	» carton dimension: 133x133x170 mm » lamp weight: 420g » 20 pcs/bulk box

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

myKAMAR

REFERENCE:
ALR0105

WARNING BEACON SMOOTH
45X LED 2 FLASHES

WARNINGS FOR THE USER:

Do not look directly into the light - it may cause damage or even loss of vision.

Install only in specialized workshops or professional services.

Use in open space only.

Use in accordance to the purpose.

INSTALLATION INSTRUCTIONS:

It should be used exclusively in accordance with intended use.

Mount exclusively in specialized workshops.

The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube or alternatively with isolating tape to avoid getting water and moisture to the copper wire of the lamp which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

Do not cut off tinned ends.

Lamps must be installed only in accordance with UNECE regulations.

TRUCK LED T

www.myKAMAR.com

PHOTO AND TECHNICAL DRAWING:

TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING WEIGHT
» Lens: PC » Housing: ABS	» 45	» Quick Fix din base	» no	» 2 warning flashes	» 20W	» 12V/24V	» ECE R10 » ECE R65	» carton dimension: 133x133x170 mm » lamp weight: 400g » 20 pcs/bulk box

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

myKAMAR

REFERENCE:
ALR0106

WARNING BEACON SMOOTH
45X LED QUICK FLEX
2 FLASHES

WARNINGS FOR THE USER:

- Do not look directly into the light - it may cause damage or even loss of vision.
- Install only in specialized workshops or professional services.
- Use in open space only.
- Use in accordance to the purpose.



INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube or alternatively with isolating tape to avoid getting water and moisture to the copper wire of the lamp which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations.

TRUCKLED

T

www.myKAMAR.com

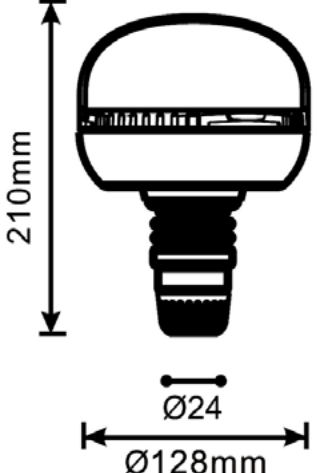

COMING SOON

R10

R65

IP 67

PHOTO AND TECHNICAL DRAWING:

TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING WEIGHT
» Lens: PC » Housing: ABS	» 45	» Quick Fix din base	» no	» 2 warning flashes	» 20W	» 12V/24V	» ECE R10 » ECE R65	» carton dimension: 133x133x210 mm » lamp weight: 490g » 20 pcs/bulk box

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

KAMAR

REFERENCE:
L1406-ALR-2

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

- Do not look directly into the light - it may cause damage or even loss of vision.

- Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

TRUCKLED

T

www.truck-kamar.pl

PHOTO AND TECHNICAL DRAWING:

TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: PPA	» 45	» flex	» ---	» 1 warning flash	» 20W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 140x140x220 mm » lamp weight: 520g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

KAMAR

REFERENCE:
L0009-ALR

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

- Do not look directly into the light - it may cause damage or even loss of vision.

- Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

TRUCKLED

T

www.truck-kamar.pl

WARNING LAMP LED MICRO MAGNETIC BASE 40LED R65 R10

PHOTO AND TECHNICAL DRAWING:

TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: ABS	» 40	» magnet	» 3m spiral cable with plug for lighter socket	» 1 warning flash	» 20W peak 7W average	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 140x140x110 mm » lamp weight: 380g » 30 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

KAMAR

REFERENCE:
L1406-ALR-O

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

- Do not look directly into the light - it may cause damage or even loss of vision.

- Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

TRUCKLED

T

www.truck-kamar.pl

WARNING LAMP 8LED 13W R65 R10 ROTATING FLEX DC12/24V

PHOTO AND TECHNICAL DRAWING:

TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: ABS	» 8	» flex	» ---	» 1 warning flash	» 13W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 130x130x260 mm » lamp weight: 530g » 20 pcs/bulk box


INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

FLASHING BEACON 24 LED R65 R10 3 SCREWS

PHOTO AND TECHNICAL DRAWING:

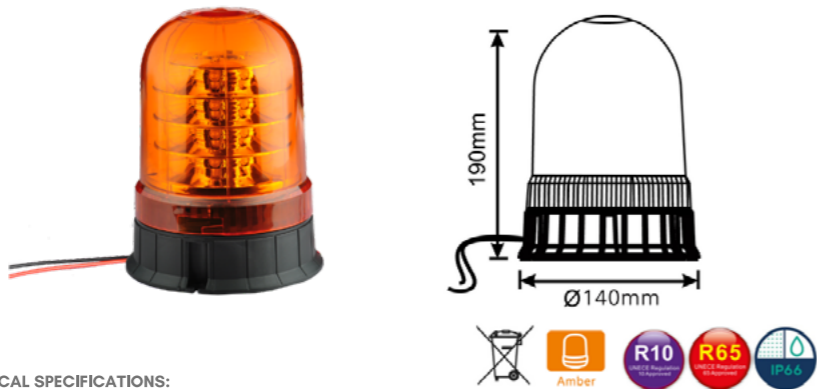

TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: ABS	» 24	» 3 screws	» 300mm	» 1 warning flash	» 38W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 150x150x220 mm » lamp weight: 220g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

ROTATING BEACON FLEX 268 X 126MM

PHOTO AND TECHNICAL DRAWING:



TECHNICAL SPECIFICATIONS:

MATERIAL	QTY BULB	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: PC	» 1 pcs H1	» flex	» ---	» rotating flash	» 55/70W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 140x140x290 mm » lamp weight: 620g » 20 pcs/bulk box


INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

ROTATING BEACON H1 WITH MAGNETIC BASE 12/24V

PHOTO AND TECHNICAL DRAWING:

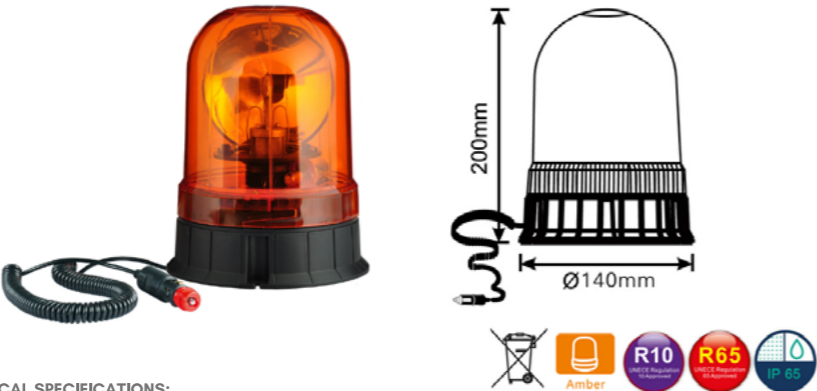

TECHNICAL SPECIFICATIONS:

MATERIAL	QTY BULB	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: PC	» 1 pcs H1	» magnet	» 3000mm	» rotating flash	» 55/70W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 150x150x220 mm » lamp weight: 700g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

LED ROTATING BEACON FOR FORKLIFTS 10-110V R10

PHOTO AND TECHNICAL DRAWING:



TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: PC	» 16	» screw	» 300mm	» 1 warning	» 13W	» 12V/24V	» ECE R10 » CE	» cart. dim.: 110x100x140 mm » lamp weight: 230g » 20 pcs/bulk box


INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

LED WARNING LAMP FOR FORKLIFT 10-110V R10

PHOTO AND TECHNICAL DRAWING:



TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: PC	» 20	» screw	» 300mm	» 1 warning	» 15W	» 12V/24V	» ECE R10 » CE	» cart. dim.: 150x150x120 mm » lamp weight: 320g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.

- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.

- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

REFERENCE:
LW0028-ALR-2

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.


- Use in accordance to the purpose.



www.truck-kamar.pl

WARNING LAMP 18XLED*3W R65 R10 MAGNETIC

PHOTO AND TECHNICAL DRAWING:



TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: PPA	» 18	» magnet	» 3m spiral cable with plug for lighter socket	» 1 warning flash	» 14-24W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 140x140x220 mm » lamp weight: 740g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.


- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.

- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

LED ROTATING BEACON FOR FORKLIFTS 10-110V R10

PHOTO AND TECHNICAL DRAWING:



TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: PC	» 24	» 3 screw	» 150 mm	» 3 warning flashes	» 25W	» 10-110V	» ECE R10 » CE	» cart. dim.: 110x100x140 mm » lamp weight: 230g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.

- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.

- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

REFERENCE:
LW0029-ALR-2

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.


- Use in accordance to the purpose.



www.truck-kamar.pl

WARNING LAMP 18XLED*3W R65 R10 FLEX

PHOTO AND TECHNICAL DRAWING:



TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: PPA	» 18	» flex	» ---	» 1 warning flash	» 14-24W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 130x130x250 mm » lamp weight: 610g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.

- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.

- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



www.truck-kamar.pl

REFERENCE
LW0045

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.



www.truck-kamar.pl



WARNING LAMP HOLDER

myKAMAR

REFERENCE: AKC1007I-A

LAMP HOLDER TYPE I

WARNINGS FOR THE USER:

- Install only in specialized workshops or professional services.
- Use in accordance to the purpose.


INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the holder and vehicle's installation should be isolated with heat-shrink tube or alternatively with isolating tape to avoid getting water and moisture to the copper wire of the holder. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Holder must be installed only in accordance with UNECE regulations.



www.myKAMAR.com

PHOTO AND TECHNICAL DRAWING:

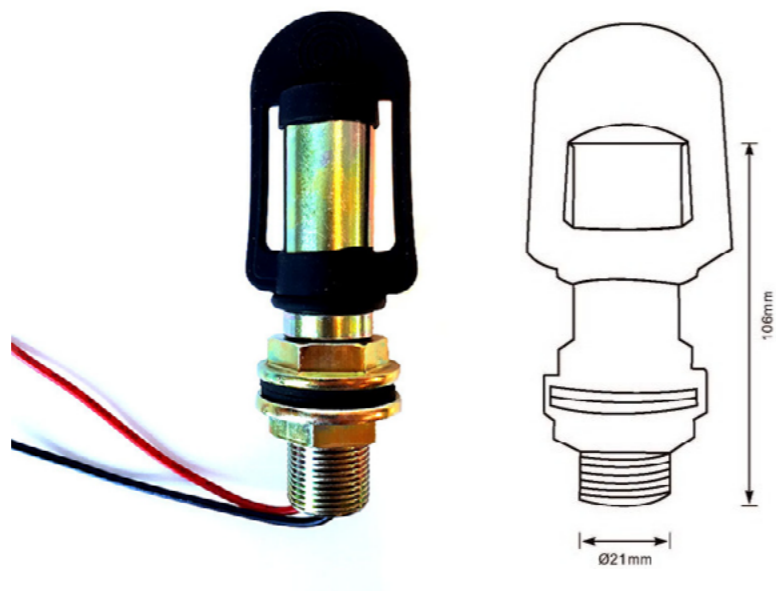

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

myKAMAR

REFERENCE: AKC1007L-A

LAMP HOLDER TYPE L

WARNINGS FOR THE USER:

- Install only in specialized workshops or professional services.
- Use in accordance to the purpose.


INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the holder and vehicle's installation should be isolated with heat-shrink tube or alternatively with isolating tape to avoid getting water and moisture to the copper wire of the holder. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Holder must be installed only in accordance with UNECE regulations.



www.myKAMAR.com

PHOTO AND TECHNICAL DRAWING:

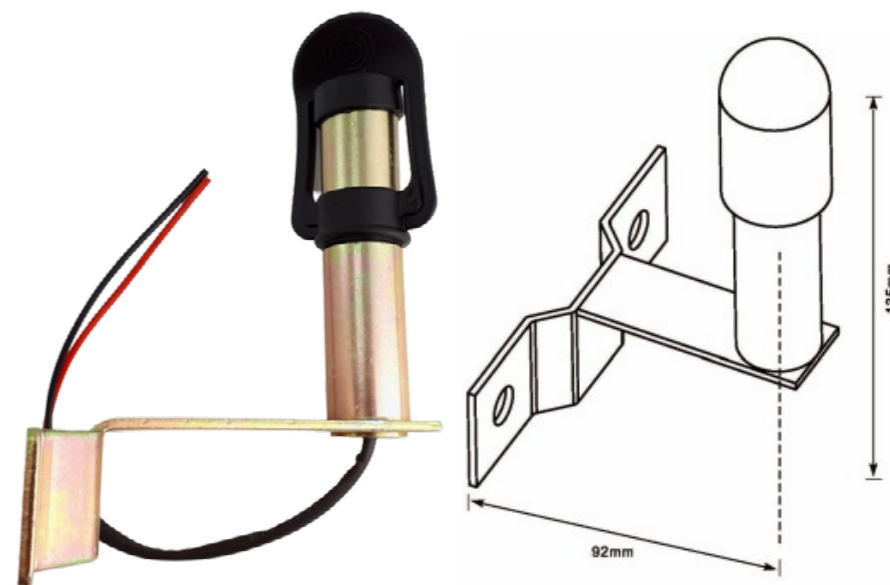

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

myKAMAR

REFERENCE: AKC1007K-A

LAMP HOLDER TYPE K

WARNINGS FOR THE USER:

- Install only in specialized workshops or professional services.
- Use in accordance to the purpose.


INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the holder and vehicle's installation should be isolated with heat-shrink tube or alternatively with isolating tape to avoid getting water and moisture to the copper wire of the holder. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Holder must be installed only in accordance with UNECE regulations.



www.myKAMAR.com

PHOTO AND TECHNICAL DRAWING:

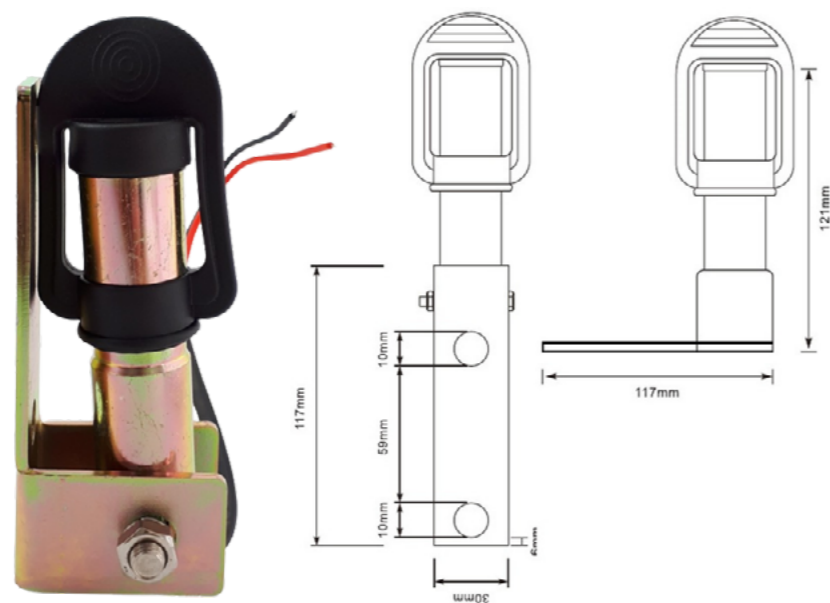

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

myKAMAR

REFERENCE: AKC1007O-A

LAMP HOLDER TYPE O

WARNINGS FOR THE USER:

- Install only in specialized workshops or professional services.
- Use in accordance to the purpose.


INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the holder and vehicle's installation should be isolated with heat-shrink tube or alternatively with isolating tape to avoid getting water and moisture to the copper wire of the holder. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Holder must be installed only in accordance with UNECE regulations.



www.myKAMAR.com

PHOTO AND TECHNICAL DRAWING:

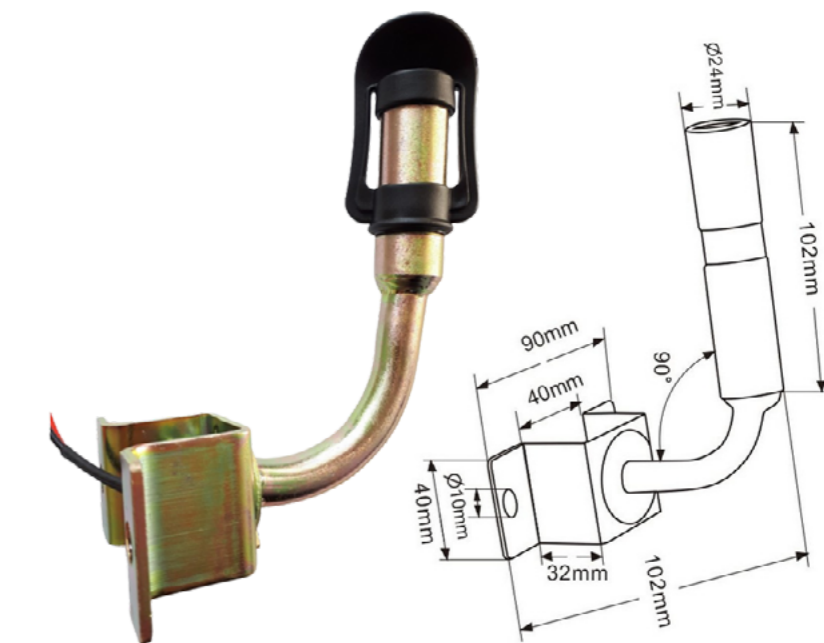

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

myKAMAR

REFERENCE: AKC1007T-A

LAMP HOLDER TYPE T

WARNINGS FOR THE USER:

- Install only in specialized workshops or professional services.
- Use in accordance to the purpose.


INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the holder and vehicle's installation should be isolated with heat-shrink tube or alternatively with isolating tape to avoid getting water and moisture to the copper wire of the holder. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Holder must be installed only in accordance with UNECE regulations.



www.myKAMAR.com

PHOTO AND TECHNICAL DRAWING:

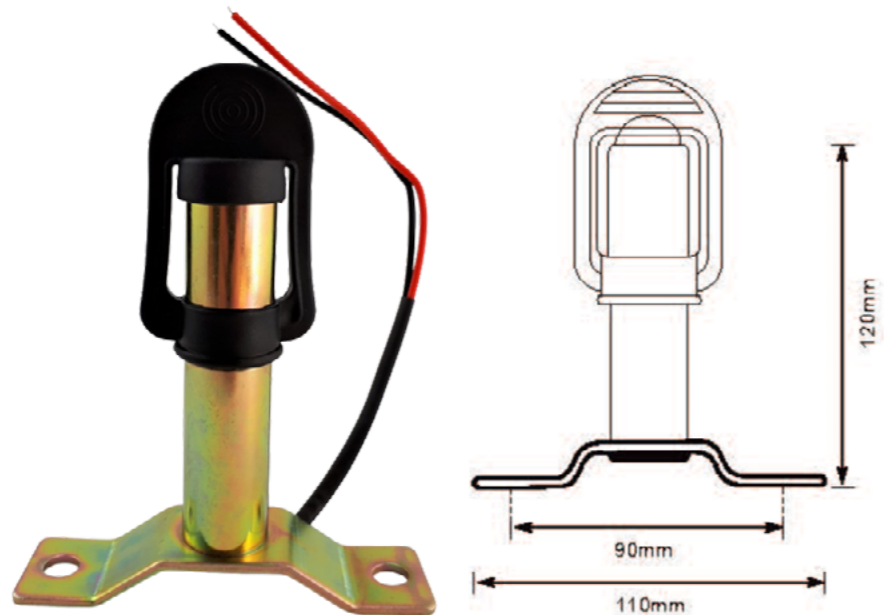

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

myKAMAR

REFERENCE: AKC1007U-A

LAMP HOLDER TYPE U

WARNINGS FOR THE USER:

- Install only in specialized workshops or professional services.
- Use in accordance to the purpose.


INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the holder and vehicle's installation should be isolated with heat-shrink tube or alternatively with isolating tape to avoid getting water and moisture to the copper wire of the holder. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Holder must be installed only in accordance with UNECE regulations.



www.myKAMAR.com

PHOTO AND TECHNICAL DRAWING:

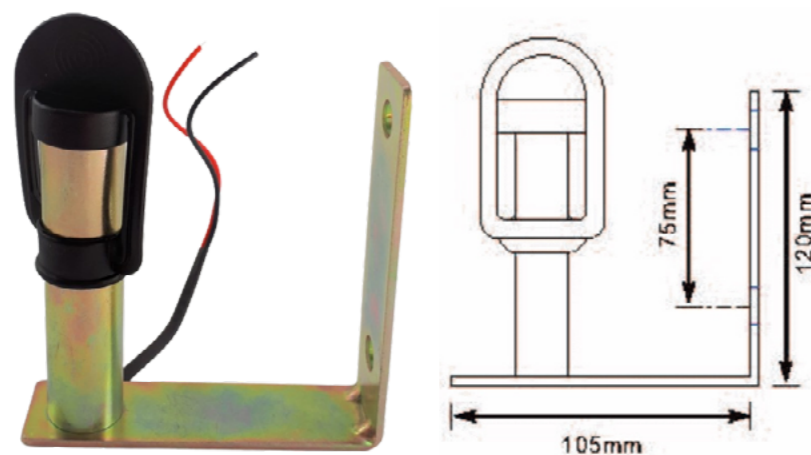

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

STROBO LAMPS





REFERENCE:
LW0023-1

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.


- Use in accordance to the purpose.



www.truck-kamar.pl

STROBO LAMP 3X LED ORANGE R10

PHOTO AND TECHNICAL DRAWING:

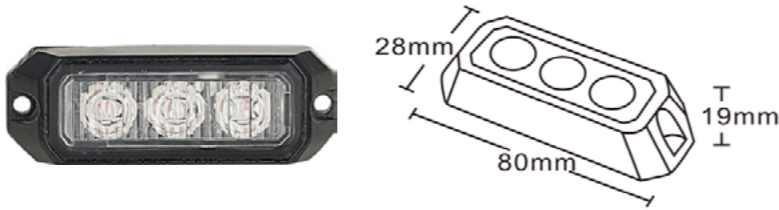

TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: AL	» 3	» screw	» 200mm	» 4 warning flashes	» 9W	» 12V/24V	» ECE R10 » CE	» cart. dim.: 150x60x50mm » lamp weight: 70g » 50 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



REFERENCE:
LW0025-ALR-1

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.


- Use in accordance to the purpose.



www.truck-kamar.pl

LED STROBO LIGHT 4X LED ORANGE R65 R10

PHOTO AND TECHNICAL DRAWING:

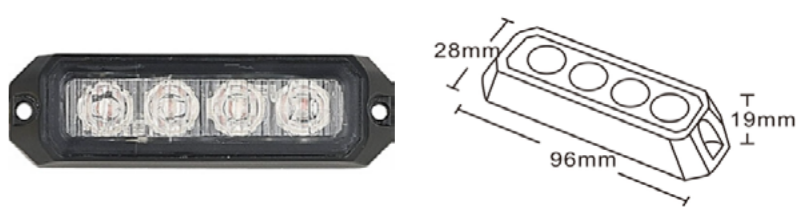

TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: AL	» 4	» screw	» 200mm	» 4 warning flashes	» 12W	» 12V/24V	» ECE R10 » ECE R65	» cart. dim.: 150x60x50 mm » lamp weight: 70g » 50 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



REFERENCE:
LW0023-5M-1

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.


- Use in accordance to the purpose.



www.truck-kamar.pl

STROBO LAMP 3X LED ORANGE R10 + 5M CABEL

PHOTO AND TECHNICAL DRAWING:

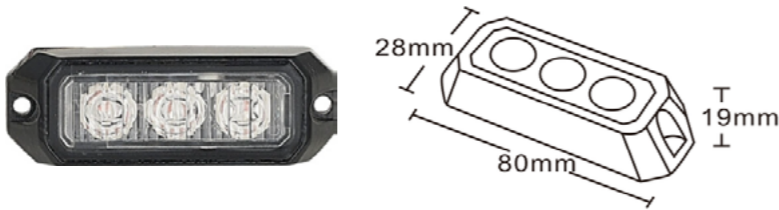

TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: AL	» 3	» screw	» 5000mm	» 4 warning flashes	» 9W	» 12V/24V	» ECE R10 » CE	» cart. dim.: 110x90x140 mm » lamp weight: 300g » 50 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



REFERENCE:
LW0032-ALR-1

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.



www.truck-kamar.pl

LED STROBO LIGHT 6XLED ORANGE R65 R10

PHOTO AND TECHNICAL DRAWING:



TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/WEIGHT
» Lens: PC » Housing: AL	» 6	» screw	» 200mm	» 3 warning flashes	» 12W	» 12V/24V	» ECE R10 » ECE R65	» cart. dim.: 150x60x50 mm » lamp weight: 90g » 50 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

REFERENCE:
LW0038-2

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

www.truck-kamar.pl

LED STROBO LIGHT 6X LED SLIM

PHOTO AND TECHNICAL DRAWING:

131mm
31mm
6.6mm

TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: AL	» 6	» screw	» 200mm	» 3 warning flashes	» 20W	» 12V/24V	» ECE R10 » ECE R65	» cart. dim: 140x50x40 mm » lamp weight: 50g » 50 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.

- Mount exclusively in specialized workshops.

- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

- Do not cut off tinned ends.

- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

REFERENCE:
LW0043

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

www.truck-kamar.pl

LED STROBE LAMP 10W AMBER R10 R65 XA2

PHOTO AND TECHNICAL DRAWING:

73
55
64
14.2
300

TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: AL	» 4	» screw	» 300mm	» 1 warning flash » two level of intensity, day and night	» 10W	» 12V/24V	» ECE R10 » ECE R65	» cart. dim: 60x60x85mm » lamp weight: 88g » 50 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.

- Mount exclusively in specialized workshops.

- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

- Do not cut off tinned ends.

- Lamps must be installed only in accordance with UNECE regulations

» Two level of intensity (Class 2) in Amber Applying yellow wire touch to red wire 1-3 seconds will activate the effective intensity 'By night'

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

REFERENCE:
LW0042

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

www.truck-kamar.pl

LED STROBE LAMP 7W AMBER R10 R65

PHOTO AND TECHNICAL DRAWING:

130
28
120
12.3
300

TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: AL	» 6	» screw	» 300mm	» 1 warning flash	» 7W	» 12V/24V	» ECE R10 » ECE R65	» cart. dim: 140x35x65mm » lamp weight: 79g » 50 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.

- Mount exclusively in specialized workshops.

- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

- Do not cut off tinned ends.

- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

REFERENCE:
LW0044

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:

Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.

- Use in accordance to the purpose.

www.truck-kamar.pl

LED STROBO LIGHT 12XLED 12/24V MAGNET

PHOTO AND TECHNICAL DRAWING:

110.2
102.6
66.6
36.6

TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERTIFICATES	PACKING/ WEIGHT
» Lens: PC » Housing: ABS	» 12	» magnet	» 3,5m spiral cable with plug for lighter socket	» 1 warning flash,	» 5W	» 12V/24V	» ECE R65 » ECE R10	» cart. dim.: 140x75x115 mm » lamp weight: 500g » 20 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.


- Mount exclusively in specialized workshops.

- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.

- Do not cut off tinned ends.

- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



REFERENCE:
LW0050

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:



Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.


- Use in accordance to the purpose.



www.truck-kamar.pl

LED STROBE LAMP + REVERSE

PHOTO AND TECHNICAL DRAWING:

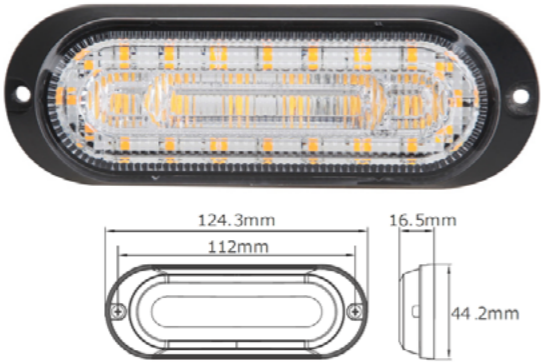


TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERT4FICATES	PACKING/WEIGHT
» Lens: PC » Housing: Aluminium	» 6 + 20	» screw	» 200mm	» Warning flash » reverse	» 18W » 10W	» 12V/24V	» ECE R10 » ECE R65 » ECE R148	» cart. dim: 140x85x45 mm » lamp weight: 105g » 50 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.



REFERENCE:
LW0050-1

COUNTRY OF ORIGIN: PRC

WARNINGS FOR THE USER:



Warning!

-Do not look directly into the light - it may cause damage or even loss of vision.

-Install only in specialized workshops or professional services.

- Use in open space only.


- Use in accordance to the purpose.



www.truck-kamar.pl

LED STROBE LAMP + REVERSE 1M CABLE

PHOTO AND TECHNICAL DRAWING:

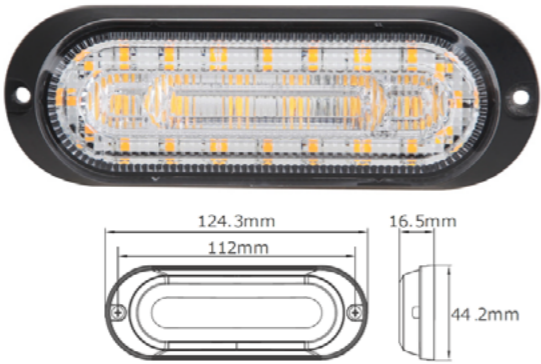

TECHNICAL SPECIFICATIONS:

MATERIAL	LED QUANTITY	MOUNTING	CABLE	FUNCTION	WATT	VOLTAGE	CERT4FICATES	PACKING/WEIGHT
» Lens: PC » Housing: Aluminium	» 6 + 20	» screw	» 1000mm	» Warning flash » reverse	» 18W » 10W	» 12V/24V	» ECE R10 » ECE R65 » ECE R148	» cart. dim: 140x85x45 mm » lamp weight: 145g » 50 pcs/bulk box

INSTALLATION INSTRUCTIONS:

- It should be used exclusively in accordance with intended use.
- Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube, or, alternatively, with isolating tape, to avoid getting water and moisture to the copper wire of the lamp, which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations

We reserve the right to change technical data and any errors. Photos and specifications are for reference only, and the actual product may vary slightly. Reproduction in whole or parts of the catalog without written authorization is prohibited.

KAMAR S.K.A.

Al. Armii Krajowej 254
85-689 Bydgoszcz
Polska

NIP 554-039-23-83
REGON 093051226

tel: /+48 / 52 326 71 50
fax: /+48 / 52 326 71 58
info@truck-kamar.pl