



my KAMAR







**WORK LAMP 4XLED MINI FLOOD** 

### **WARNINGS FOR THE USER:**

- Do not look directly into the light it may cause damage or even loss of vision.
- Install only in specialized workshops or professional services.
- · Use in open space only.
- · Use in accordance to the purpose.

### **INSTALLATION INSTRUCTIONS:**

- It should be used exclusively in accordance with intended use.
- · Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube or alternatively with isolating tape to avoid getting water and moisture to the copper wire of the lamp which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- · Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations.

### **COUNTRY OF ORIGIN: PRC**






www.myKAMAR.com

### PHOTO AND TECHNICAL DRAWING:



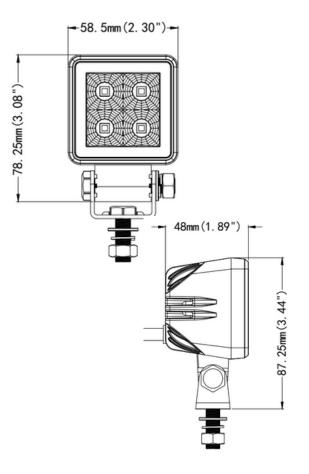







### **TECHNICAL SPECIFICATIONS:**

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING WEIGHT
» Lens: PC » Housing: AL	» 4 » 1800 LM	» screw	» 250mm	» work light » flood	» 18W	» 12V/24V	» ECE R10	» carton dimension: 85x70x70 mm » lamp weight: 220g » 60 pcs/bulk box



## **WORK LAMP 4XLED MINI SPOT**

### **WARNINGS FOR THE USER:**

- Do not look directly into the light it may cause damage or even loss of vision.
- Install only in specialized workshops or professional services.
- · Use in open space only.
- · Use in accordance to the purpose.

### **INSTALLATION INSTRUCTIONS:**

- It should be used exclusively in accordance with intended use.
- · Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube or alternatively with isolating tape to avoid getting water and moisture to the copper wire of the lamp which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- · Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations.

### **COUNTRY OF ORIGIN: PRC**






www.myKAMAR.com

### PHOTO AND TECHNICAL DRAWING:



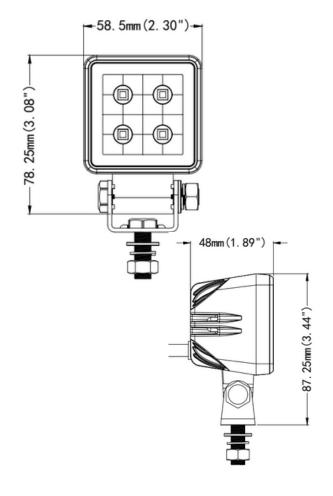







### **TECHNICAL SPECIFICATIONS:**

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING WEIGHT
» Lens: PC » Housing: AL	» 4 » 1800 LM	» screw	» 250mm	» work light » flood	» 18W	» 12V/24V	» ECE R10 » ECE R148 » ECE R149	» carton dimension: 85x70x70 mm » lamp weight: 220g » 60 pcs/bulk box



## **WORK LAMP 9XLED ROUND PLUS**

### **WARNINGS FOR THE USER:**

- Do not look directly into the light it may cause damage or even loss of vision.
- Install only in specialized workshops or professional services.
- · Use in open space only.
- · Use in accordance to the purpose.

### **INSTALLATION INSTRUCTIONS:**

- It should be used exclusively in accordance with intended use.
- · Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube or alternatively with isolating tape to avoid getting water and moisture to the copper wire of the lamp which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- · Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations.

### **COUNTRY OF ORIGIN: PRC**






www.myKAMAR.com

### PHOTO AND TECHNICAL DRAWING:











### TECHNICAL SPECIFICATIONS:

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING WEIGHT
» Lens: PC » Housing: AL	» 9 » 1133 LM	» screw	» 250mm	» work light » flood	» 20W	» 12V/24V	» ECE R10	» carton dimension: 119x65x148 mm » lamp weight: 290g » 20 pcs/bulk box



**WORK LAMP 9XLED SQUARE PLUS** 

### **WARNINGS FOR THE USER:**

- Do not look directly into the light it may cause damage or even loss of vision.
- Install only in specialized workshops or professional services.
- · Use in open space only.
- · Use in accordance to the purpose.

### **INSTALLATION INSTRUCTIONS:**

- It should be used exclusively in accordance with intended use.
- · Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube or alternatively with isolating tape to avoid getting water and moisture to the copper wire of the lamp which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- · Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations.

### **COUNTRY OF ORIGIN: PRC**






www.myKAMAR.com

### PHOTO AND TECHNICAL DRAWING:











### **TECHNICAL SPECIFICATIONS:**

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING WEIGHT
» Lens: PC » Housing: AL	» 9 » 1133 LM	» screw	» 250mm	» work light » flood	» 20W	» 12V/24V	» ECE R10	» carton dimension: 119x65x148 mm » lamp weight: 290g » 20 pcs/bulk box



**WORK LAMP 16XLED SQUARE PLUS** 

### **WARNINGS FOR THE USER:**

- Do not look directly into the light it may cause damage or even loss of vision.
- Install only in specialized workshops or professional services.
- · Use in open space only.
- · Use in accordance to the purpose.

### **INSTALLATION INSTRUCTIONS:**

- It should be used exclusively in accordance with intended use.
- · Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube or alternatively with isolating tape to avoid getting water and moisture to the copper wire of the lamp which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- · Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations.

### **COUNTRY OF ORIGIN: PRC**






www.myKAMAR.com

### PHOTO AND TECHNICAL DRAWING:











### **TECHNICAL SPECIFICATIONS:**

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING WEIGHT
» Lens: PC » Housing: AL	» 16 » 1711 LM	» screw	» 250mm	» work light » flood	» 25W	» 12V/24V	» ECE R10	» carton dimension: 119x65x148 mm » lamp weight: 315g » 20 pcs/bulk box



# HEAD LAMP BEZEL-LESS LONG 12/24V LED WITH DT CONNECTOR

#### **WARNINGS FOR THE USER:**

- Do not look directly into the light it may cause damage or even loss of vision.
- Install only in specialized workshops or professional services.
- · Use in open space only.
- Use in accordance to the purpose.

### **INSTALLATION INSTRUCTIONS:**

- It should be used exclusively in accordance with intended use.
- · Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube or alternatively with isolating tape to avoid getting water and moisture to the copper wire of the lamp which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- · Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations.

### **COUNTRY OF ORIGIN: PRC**







www.myKAMAR.com

### PHOTO AND TECHNICAL DRAWING:





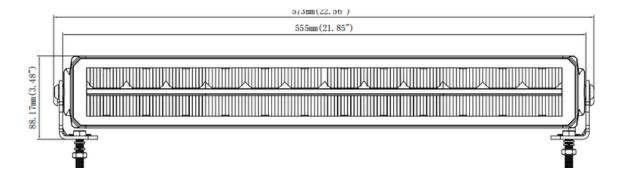













### **TECHNICAL SPECIFICATIONS:**

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING WEIGHT
» Lens: PC » Housing: AL	» 24 + 48 » 7927 LM	» screw	» 300mm with DT connector	» line position » driving light	» 11W » 95W	» 12V/24V	» ECE R10 » ECE R148 » ECE R149	» carton dimension: 657x111x93 mm » lamp weight: 2000g » 4 pcs/bulk box



# HEAD LAMP LED + LINE POSITION LED 12/24V WITH DT CONNECTOR

### **WARNINGS FOR THE USER:**

- Do not look directly into the light it may cause damage or even loss of vision.
- Install only in specialized workshops or professional services.
- · Use in open space only.
- · Use in accordance to the purpose.

### **INSTALLATION INSTRUCTIONS:**

- It should be used exclusively in accordance with intended use.
- · Mount exclusively in specialized workshops.
- The connection between the lamp and vehicle's installation should be isolated with heat-shrink tube or alternatively with isolating tape to avoid getting water and moisture to the copper wire of the lamp which can damage electronic components. When it comes to lamp and plug, the plug should be mounted safely.
- · Do not cut off tinned ends.
- Lamps must be installed only in accordance with UNECE regulations.

### **COUNTRY OF ORIGIN: PRC**







www.myKAMAR.com

### PHOTO AND TECHNICAL DRAWING:



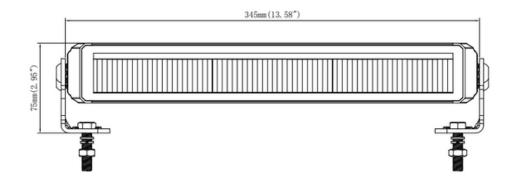













### **TECHNICAL SPECIFICATIONS:**

MATERIAL	QUANTITY LED/LM	MOUNTING	WIRE	FUNCTION	WATT	VOLTAGE	CERTYFICATES	PACKING WEIGHT
» Lens: PC » Housing: AL	» 6 + 21 » 3810 LM » 10 LM	» screw	» 300mm with DT connector	» line position » driving light	» 8W » 42W	» 12V/24V	» ECE R10 » ECE R148 » ECE R149	» carton dimension: 462x110x68 mm » lamp weight: 1600g » 8 pcs/bulk box

